

SER-H410A

4 CH H.264 Digital Video Recorder




Features

- Advanced H. 264 Technology
- Pentaplex Operation: Live, Record, Playback, Network
- Maximum 120/100fps (NTSC/PAL) recording
- 1 CH Audio recording
- SATA II Compatible HDD support
- Smart CMS Included
- Intelligent 3G/GPRS surveillance on Operating system
- Multi Languages Support
- Graphical User Interface (GUI) for user friendly configuration and operation
- Easy control by mouse, remote controller or Network



Advance H.264 Compression Algorithm

Using the latest H.264 hardware compression technology, the DVR can record video data more efficiently and maximize the usage of Hard Disk.

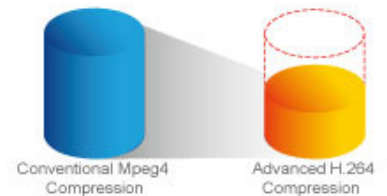

Powerful Network Capability

Convenient network connection allows user to monitor and operate the DVR system whenever and wherever they want.



Easy and User Friendly Operations

The DVR is designed with user friendly graphic interface, all functions are easy to setup and operate by mouse, IR remote controller or remote PC.



Central Management System

Bundle with smart central management system, the DVR allows user to monitor and control their surveillance system at different locations through one PC.



Specifications :

Model No.			SER-H410A
Video Input (NTSC/PAL)			4
Video Compression			H.264 (Internet Transmission:H.264)
Video Output			BNC x 2 (Monitor Out x 1; SPOTx1) ; VGA OUT x 1
Audio Input			RCA x 1
Audio Output			RCA x 1
Sensor In / Alarm Out			4 Sensor In / 1 Alarm Out
Display	Speed	NTSC	720 x 480 (120 fps)
		PAL	720 x 576 (100 fps)
	Division		1,4
	Mode		Zoom x 2 、 PIP 、 Auto SEQ
Recording	Resolution	NTSC	720x480 、 720x240 、 360x240
		PAL	720x576 、 720x288 、 360x288
	Picture Quality		5 Levels (Highest 、 High 、 Normal 、 Low 、 Lowest)
	Mode		Normal 、 Motion 、 Alarm 、 Schedule
	Speed	NTSC	30 fps(720x480) ,60fps(720x240) ,120fps(352x240)
		PAL	25fps(720x576) ,50fps(704x288) ,100fps(352x288)
Playback	Display		1,4
	Speed	NTSC	30fps(720x480) ,60fps(720x240) ,120fps(352x240);
		PAL	25fps(720x576) ,50fps(704x288) ,100fps(352x288)
	Search		Time 、 Event 、 Calender
	Speed		Normal 、 REW&FF (2x 、 4x 、 8x 、 16x 、 32x 、 64x) ,Pause
Storage	Device		1 Internal SATA HDD
Motion Detection			Yes
Pre-Alarm Recording			16MB(approximate 8 seconds-10seconds)
Ethernet			1 RJ 45 Connector, 10/100 Mbps
External I/O			1 RS 485, 4 sensor Input, 1 Relay Output
Backup Device			USB2.0 ,Remote Network Backup
On Screen Display			GUI(Graphic User Interface)
DVR Control			Remote Controller ,USB Mouse
3G / GPRS			Built-In (Mobile 5.0 , 6.0 and Symbian support)
Dimensions WxHxD (mm)			300 x 45 x 176
Power			DC 12 V (4A)

Design and specifications are subject to change without prior notice.